


MODEL SB555S



MODEL SB650S

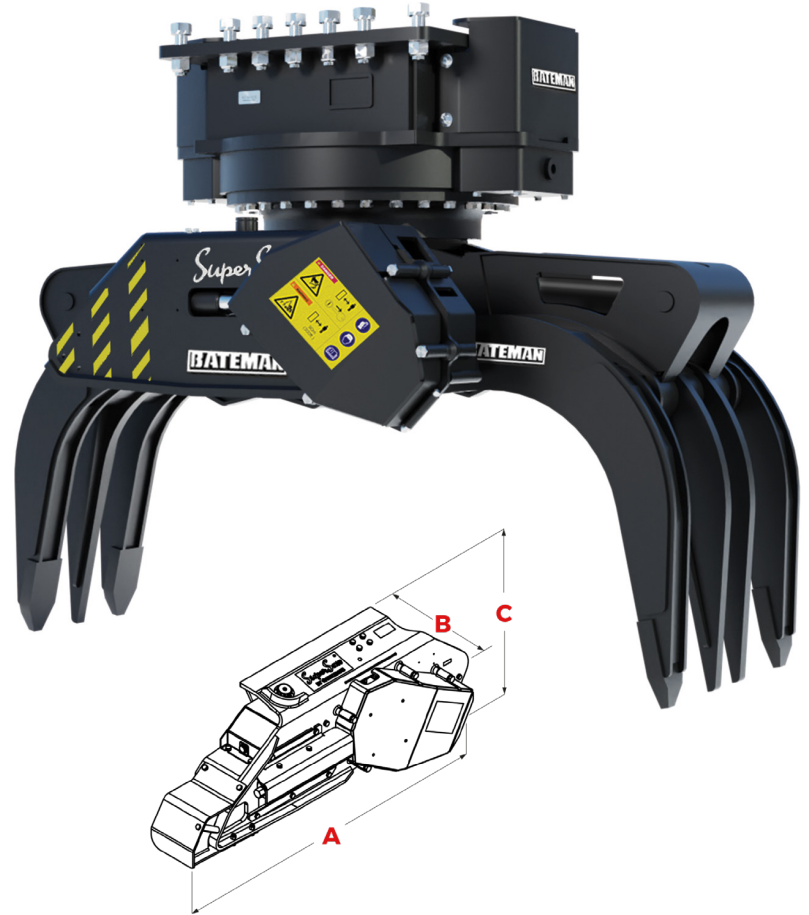

Saw Bar Model		SB555S-10	SB555S-19	SB555S-19+	SB650S	SB650S+
Saw Motor Displacement	cu. in (cm ³)	0.61 (10)	1.16 (19)	1.16 (19)	2.44 (40)	2.44 (40)
Weight	lb (kg)	375 (170)	375 (170)	375 (170)	584 (265)	584 (265)
Length (A)	in (mm)	47 (1 195)	47 (1,195)	52 1/2 (1 313)	55 (1 397)	60 (1 500)
Width (B)	in (mm)	13 1/8 (332)	13 1/8 (332)	13 1/8 (332)	15 (383)	15 (383)
Height (C)	in (mm)	18.3 (465)	18.3 (465)	18.3 (465)	20 (511)	20 (511)
Min. Hydraulic Pressure	PSI (Bar)	3,200 (221)	3,200 (221)	3,200 (221)	3,100 (214)	3,100 (214)
Min. Hydraulic Flow	gpm (l/m)	30 (136)	39 (177)	39 (177)	55 (250)	55 (250)
Chain Model		404-18H	404-18H	404-18H	750-11H	750-11H
Saw Bar	in (cm)	35 (90)	35 (90)	39 (100)	39 (100)	45 (115)
Saw Bar Feed System		Pressure Line	Pressure Line	Pressure Line	Return Line	Return Line